

# ORDERING INFORMATION

Device	Temperature Range	Package
MC1454G	0°C to +70°C	Metal Can
MC1554G	-55°C to +125°C	Metal Can

MC1454G

MC1554G


## 1-WATT POWER AMPLIFIERS

... designed to amplify signals to 300-kHz with 1-Watt delivered to a direct coupled or capacitively coupled load.


- Low Total Harmonic Distortion — 0.4% (Typ) @ 1 Watt
- Low Output Impedance — 0.2 Ohm
- Excellent Gain — Temperature Stability

## 1-WATT POWER AMPLIFIER INTEGRATED CIRCUIT


SILICON MONOLITHIC  
EPITAXIAL PASSIVATED

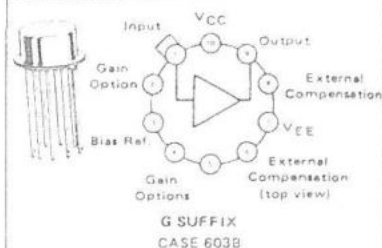


VOLTAGE GAIN versus FREQUENCY ( $R_L = 16 \text{ OHMS}$ )

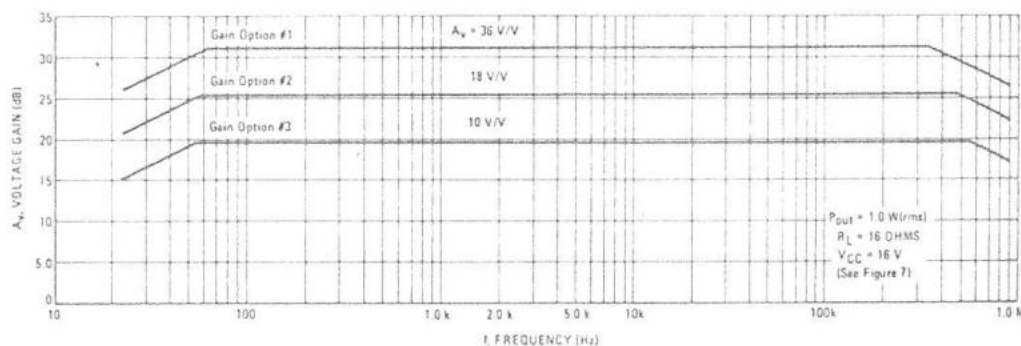

CIRCUIT SCHEMATIC



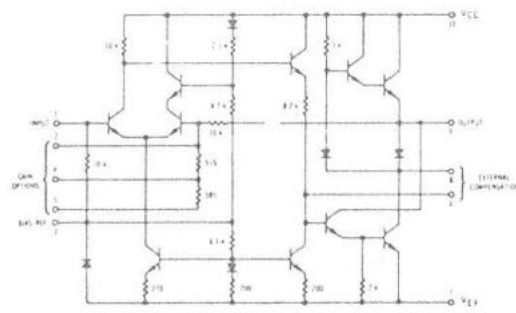


MAXIMUM AVAILABLE OUTPUT POWER (SINE WAVE)

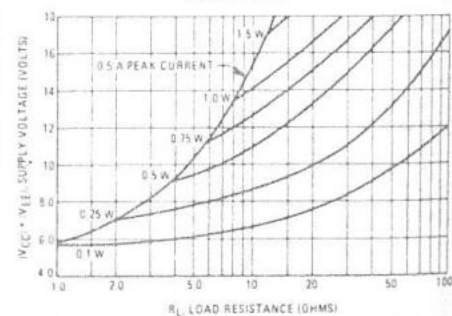

MC1454G

MC1554G

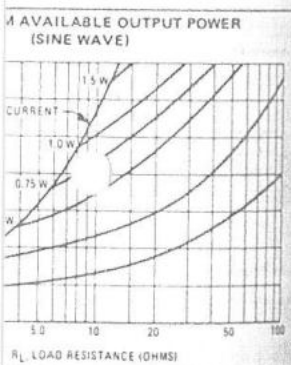1-WATT  
POWER AMPLIFIER  
INTEGRATED CIRCUITSILICON MONOLITHIC  
EPITAXIAL PASSIVATEDELECTRICAL CHARACTERISTICS ( $T_C = +25^\circ\text{C}$  unless otherwise noted)  
Frequency compensation shown in Figures 6 and 7.

Characteristic	Figure	$R_L$ (Ohms)	Gain Option*	Symbol	MC1554 (-55 to +125°C)			MC1454 (0 to +70°C)			Unit
					Min	Typ	Max	Min	Typ	Max	
Output Power (for $e_{out} < 5.0\%$ THD)	1	16	—	$P_{out}$	1.0	1.1	—	—	1.0	—	Watt
Power Dissipation (@ $P_{out} = 1.0 \text{ W}$ )	1	16	—	$P_D$	—	0.9	1.2	—	0.9	—	Watt
Voltage Gain	1	16	10	$A_v$	8.0	10	12	—	10	—	V/V
		16	18		—	18	—	—	18	—	
		16	36		—	36	—	—	36	—	
Input Impedance	1	—	10	$z_{in}$	7.0	10	—	3.0	10	—	k $\Omega$
Output Impedance	1	—	10	$z_o$	—	0.2	—	—	0.4	—	$\Omega$
Power Bandwidth (for $e_{out} < 5.0\%$ THD)	2	16	10	BW	—	270	—	—	270	—	kHz
		16	18		—	250	—	—	250	—	
		16	36		—	210	—	—	210	—	
Total Harmonic Distortion (for $e_{in} < 0.05\%$ THD, $f = 20 \text{ Hz}$ to $20 \text{ kHz}$ )	2	—	—	THD	—	—	—	—	—	—	%
		16	10		—	0.4	—	—	0.4	—	
		16	10		—	0.5	—	—	0.5	—	
Zero Signal Current Drain	3	$\infty$	—	$I_D$	—	11	15	—	11	20	mAdc
Output Noise Voltage	3	16	10	$V_n$	—	0.3	—	—	0.3	—	mVrms
Output Quiescent Voltage (Split Supply Operation)	4	16	—	$V_o \text{ (dc)}$	—	$\pm 10$	$\pm 30$	—	$\pm 10$	—	mVdc
Positive Supply Sensitivity ( $V_{EE}$ constant)	5	$\infty$	—	$S^+$	—	-40	—	—	-40	—	mV/V
Negative Supply Sensitivity ( $V_{CC}$ constant)	5	$\infty$	—	$S^-$	—	-40	—	—	-40	—	mV/V

\* To obtain the voltage gain characteristic desired, use the following pin connections: Voltage Gain

Pin Connection

10 Pins 2 and 4 open, Pin 5 to ac ground

18 Pins 2 and 5 open, Pin 4 to ac ground

36 Pin 2 connected to Pin 5, Pin 4 to ac ground

Characteristic Definitions  
(Linear Operation)

FIGURE 1




FIGURE 2




FIGURE 3




FIGURE 4







FIGURE 5



MAXIMUM RATINGS ( $T_C = +25^\circ\text{C}$  unless otherwise noted)

Rating	Symbol	Value	Unit
Total Power Supply Voltage	$ V_{CC}  +  V_{EE} $	18	Vdc
Peak Load Current	$I_{out}$	0.5	Amps
Audio Output Power	$P_{out}$	1.8	Watts
Power Dissipation (package limitation)			
$T_A = +25^\circ\text{C}$	$P_D$	600	mW
Derate above $25^\circ\text{C}$	$1/\theta_{JA}$	4.8	$\text{mW}/^\circ\text{C}$
$T_C = +25^\circ\text{C}$	$P_D$	1.8	Watts
Derate above $25^\circ\text{C}$	$1/\theta_{JC}$	14.4	$\text{mW}/^\circ\text{C}$
Operating Temperature Range	$T_A$	0 to $+70$	$^\circ\text{C}$
	MC1554	$-55$ to $+125$	
Storage Temperature Range	$T_{stg}$	$-55$ to $+150$	$^\circ\text{C}$

## TYPICAL CONNECTIONS

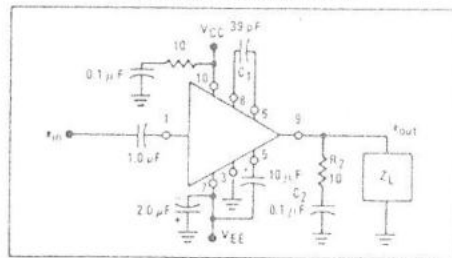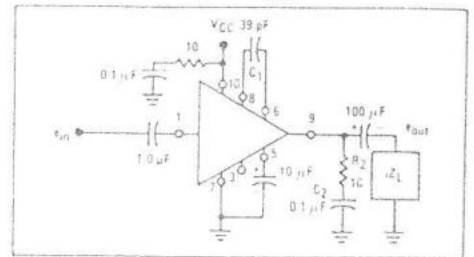FIGURE 6 — SPLIT SUPPLY OPERATION VOLTAGE  
GAIN ( $A_V$ ) = 10,  $f_{LOW} \approx 25\text{ Hz}$ FIGURE 7 — SINGLE SUPPLY OPERATION VOLTAGE  
GAIN ( $A_V$ ) = 10,  $f_{LOW} \approx 100\text{ Hz}$ 

## RECOMMENDED OPERATING CONDITIONS



In order to avoid local VHF instability, the following set of rules must be adhered to:

1. An R-C stabilizing network (0.1  $\mu\text{F}$  in series with 10 ohms) should be placed directly from pin 9 to ground, as shown in Figures 6 and 7, using short leads, to eliminate local VHF instability caused by lead inductance to the load.
2. Excessive lead inductance from the  $V_{CC}$  supply to pin 10 can cause high frequency instability. To prevent this, the  $V_{CC}$  by pass capacitor should be connected with short leads from the  $V_{CC}$  pin to ground. If this capacitor is remotely located a series R-C network (0.1  $\mu\text{F}$  and 10 ohms) should be used directly from pin 10 to ground as shown in Figures 6 and 7.

3. Lead lengths from the external components to pins 7, 9, and 10 of the package should be as short as possible to insure good VHF grounding for these points.

Due to the large bandwidth of the amplifier, coupling must be avoided between the output and input leads. This can be assured by either (a) use of short leads which are well isolated, (b) narrow banding the overall amplifier by placing a capacitor from pin 1 to ground to form a low pass filter in combination with the source impedance, or (c) use of a shielded input cable. In applications which require upper band edge control the input low pass filter is recommended.


## TYPICAL CHARACTERISTICS

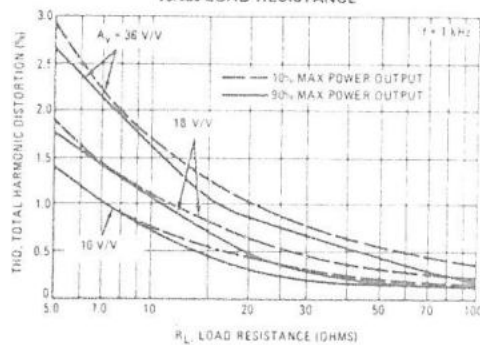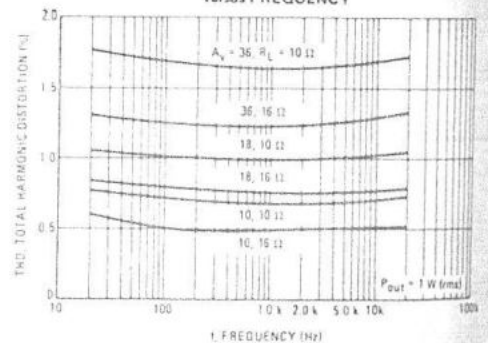FIGURE 8 — TOTAL HARMONIC DISTORTION  
versus LOAD RESISTANCEFIGURE 9 — TOTAL HARMONIC DISTORTION  
versus FREQUENCY



Pin	Unit
3	V <sub>dc</sub>
5	Ampere
8	Watts
10	mW
18	mW/°C
1.4	Watts
1.4	mW/°C
1.4	°C
1.4	°C


APPLY OPERATION VOLTAGE  
= 10,  $f_{LOW} \approx 100$  Hz



Final components to pins 7, 9, and 10 of the  
t as possible to insure good VHF grounding

of the amplifier, coupling must be avoided be-  
ads. This can be assured by either (a) use of  
ated (b) narrow banding the overall amplifier  
in 1 to ground to form a low pass filter in com-  
diance, or (c) use of a shielded input cable. In  
per band edge control the input low pass filter

TOTAL HARMONIC DISTORTION  
versus FREQUENCY



# TYPICAL CHARACTERISTICS (continued)

FIGURE 10 – VOLTAGE GAIN versus TEMPERATURE

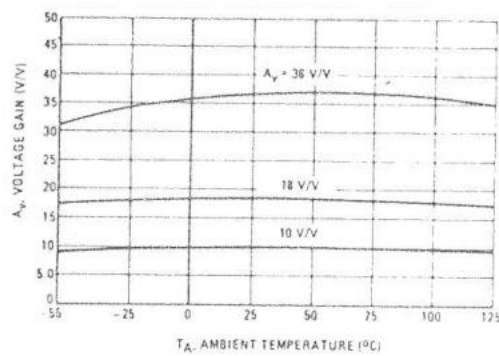


FIGURE 11 – OUTPUT VOLTAGE CHANGE

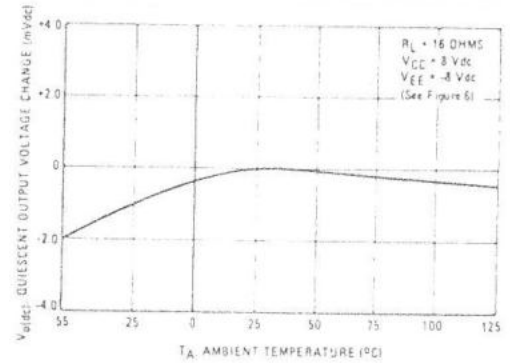


FIGURE 12 – VOLTAGE GAIN versus FREQUENCY ( $R_L = \infty$ )

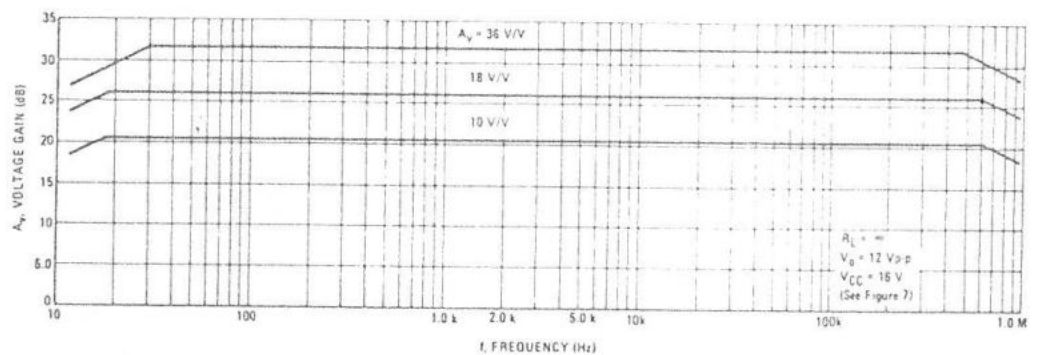


FIGURE 13 – MAXIMUM DEVICE DISSIPATION  
(SINE WAVE)

